


BOARD AND BATTEN

MATERIAL SPECIFICATIONS

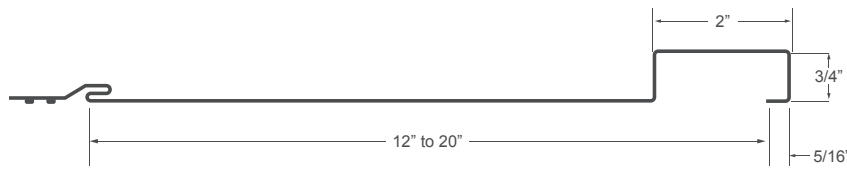

Available Widths:
 12.375" (Specialized)
 16.375" (Standard)
 20.375" (Specialized)

Available Gauges:
 24 & 26 (Special Order)

Weight:
 1.001bs/SqFt (24), .75lbs/SqFt (26)

Substrate: AZ-50, Grade D, 50,000ksi

Available Materials:
 Painted, Galvalume, Bonderized®,
 16 & 20 oz Copper


Paint Systems:
 Durapon70™ PVDF, ULTRA CLAD™
 Kynar500%/Hylar5000®
 Valspar Fluoropon®

Warranties:


Durapon70™ PVDF	35 year
ULTRA-CLAD™	35 year
Zincalume® AZ50	20 year
Valspar™ PVD	35 year



APPLICATION DETAILS

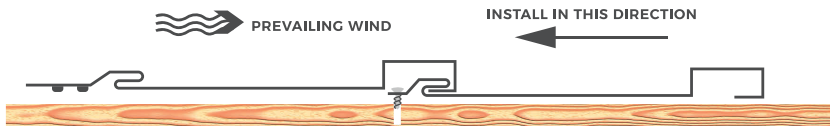

*Fastener Spacing 2' on Center

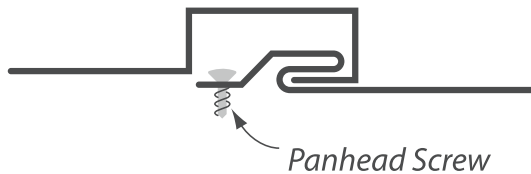

Production Options: Either factory made to length with protective film to ensure damage free transport or rolled to length on site*

Panel Options: Flat panel or striations (flat panel requires a waiver)

Installation: Can be installed on solid wood decking

Minimum Slope: Wall Mount Only

Specifications for:

- Class 4 Hail Impact
- Class A Fire Rating

Please Note: It is the responsibility of the builder to ensure that they are compliant with current building codes.


Oil Canning is not a reason for rejection of panels

Epic Steel is neither partially or soley responsible for improper installation or defects as a result of installation


BOARD AND BATTEN STANDARD TRIM

10'0" STICK


J-Metal (Full-Return)




Inside Corner*




Outside Corner*

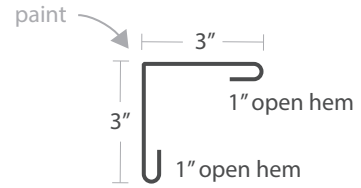


Wainscot




F&J (1/2" x 3/4")




Square Base




Angle Base




L-Base/Drip




Flat Base



Z-Bar



J-Metal (no hem)



*Use with Z-Bar or J-Metal (no hem)