



ATLAS


BUILDING PRODUCTS

A MARMON BERKSHIRE HATHAWAY COMPANY

PRODUCT SPECIFICATION SHEET

#10 WOODTITE®

#10 WOODTITE®

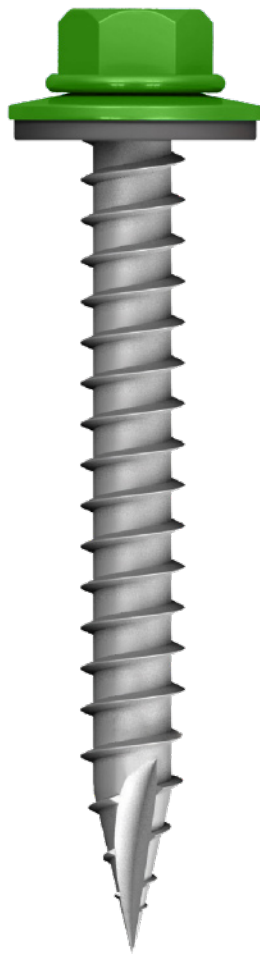

Head

Head Style: 1/4"

Wet paint application for consistent socket fit and weathering performance

Washer

Bonded Sealing Washer

Thread

Major Hi Diameter: .194"/.184"

Minor Diameter: .133"/.128"

Point

Type-17 point helps to penetrate metal more quickly while minimizing chips

26 Degree sharp point for quick piercing

Finish

Zinc Plated with Oxysel® Coating

Material

Carbon Steel

Installation Instructions

- Do not use impact style guns
- Use an electric screw gun
- 2,500 RPM max

SIZE	ITEM #	# PER M	BOX QTY
10-14 x 1	83639ZBN99XXHSL	7.4	2,500
10-14 x 1-1/2	83642ZBN99XXHSL	9.8	2,500
10-14 x 2	83644ZBN99XXHSL	12.0	2,000
10-14 x 2-1/2	83646ZBN99XXHSL	14.2	1,500
10-14 x 3	83648ZBN99XXHSL	16.4	1,000

MINIMUM TORSIONAL	MINIMUM TENSILE	MINIMUM SHEAR	PULL OUT SPF2-1.5" PENETRATION	REVOLUTIONS/IN.
68 in. lbs.	2,100 lbs.	1,265 lbs.	925 lbs.	7.0

All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Actual field values may vary, therefore we assume no liability for use of this information. Pull out values are a measurement of wood material strength



ASHLAND OHIO

1628 TROY ROAD
ASHLAND, OH 44805
(800) 321-6977

FLAT ROCK NORTH CAROLINA

161 COMMERCIAL BLVD
FLAT ROCK, NC 28731
(828) 692-2603

HOUSTON TEXAS

4822 N. SAM HOUSTON PKWY W.
SUITE 100
HOUSTON, TX 77086
(800) 503-2105